

ROCK TILE GROUT

Grouting for Tile Joints

PRODUCT DESCRIPTION	Rock Tile Grout is a fine powder, which requires only the addition of water to produce a smooth paste that is suitable for grouting ceramic tiles and similar applications. It contains selected hydraulic binders, organic binder, waterproofing materials, and inert hard aggregates. It is supplied in powder form in six standard colors.
USES	Rock Tile Grout is formulated as waterproofing grout suitable for filling tile joints in: <ul style="list-style-type: none"> □ Kitchens. □ Swimming pools, □ Bathrooms. <p>And similar applications.</p>
ADVANTAGES	<ul style="list-style-type: none"> □ Easy for application. □ Waterproofing. □ Self-cured. □ Thixotropic, non-slump application. □ Mold resistance. □ Ideal for both internal and external applications. □ It is non-toxic, chloride-free and does not contain any harmful materials. <p>Formulated to be suitable for the Middle East conditions</p>
Standards	Rock Tile Grout complies with the requirements of BS 5980.
PRODUCT DATA	Cement-based grout.
Type	
Colour	Six standard colors: White, brick, red, brown, yellow, green, or black. Special color can be provided upon request.
Packaging	4 kg and 25 kg bags
Storage Condition	In well-sealed containers away from any source of moisture.
Shelf Life	12 months if stored properly in well-sealed original containers.
Technical Data	
Density	2.0 Kg/l
Open time	Approximately 100 minutes at 20 °C and 45 minutes at 35 °C.
APPLICATION	
Consumption	Consumption will be influenced by the type, size and spacing between the ceramic tiles, but approximately is 0.25 kg/m ² .
Mixing	Rock Tile Grout is supplied in powder form, which requires only the addition of water. Add 4 kg of Rock Tile Grout to 1.00 – 1.20 liter of clean water in a clean vessel and mix until a homogenous, smooth, easy to be applied, free from lumps paste is achieved, in case of 25 kg add 6.25 – 7.5 liter of clean water. Allow to stand for 5 minutes.

Application


- Apply Rock Tile Grout to the space between ceramic tiles using a sponge, or piece of soft cloth. Work the paste in to the joints and around the edges.
- Remove surplus grout from the face of the tile using dry cloth.
- When the grout is completed, polish tiles with dry cloth

Cleaning

Clean all tools & equipment with clean water after finish of work immediately. Hardened materials shall be removed mechanically.

SAFETY
INSTRUCTIONS
SAFETY
PRECAUTIONS

- Rock Tile Grout is non-toxic, non-flammable and does not contain any harmful ingredients.
- Dust mask and gloves shall be used during handle.
- Rock Tile Grout contains Portland cement, so it will produce alkaline material after mixing with water.
- Avoid skin and eye contact. In case of contamination, wash with plenty amounts of clean water.
- Please consult our safety data sheet for more information (available upon request)

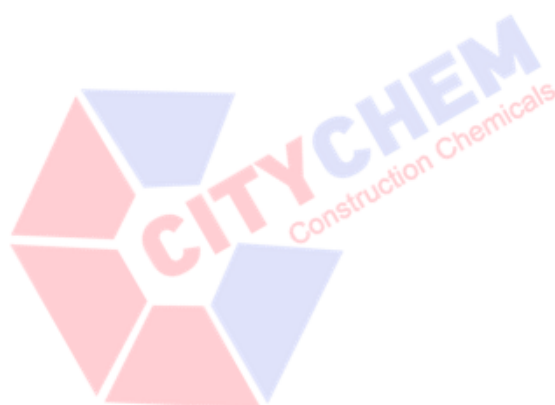

Al-Obour Buildings - Salah Salem Road - Nasr City - Cairo - Egypt.
 10th Of Ramadan City.



info@CityChem.net



[@City_Chem](https://twitter.com/City_Chem)



[City Chem](https://www.facebook.com/CityChem)



+202 240 456 35



+2010 277 810 11



+2010 672 213 44

The Information Herein is Based on Our Present Knowledge and Experiences. This Information Merely Describes the Properties of Our Products but No Guarantee In the legal Sense Shall Be Implied. We Recommend Testing Our Products As To Their Suitability For Your Envisaged Purpose Prior To Use. No Warranties Of Any Kind, Either Express or Implied Including Warranties of Merchantability or Fitness For a Particular Purpose Are Made Regarding Any Products Mentioned Herein and Data or Information That Such Products, Data or Information May Be Used Without Infringing Intellectual Property Rights of Third Parties. We Reserve The Right To Make Any Changes According To Technological Progress or Further Developments. This Copy Replaces All Previous Versions - Printed in Egypt - 2020.



CONSTRUCTION